

Transesterification of soybean oil with methanol and acetic acid at lower reaction severity under subcritical conditions



Alchris Woo Go^a, Sylviana Sutanto^a, Bich Thuyen NguyenThi^a, Luis K. Cabatingan^c, Suryadi Ismadji^b, Yi-Hsu Ju^{a,*}

^a Department of Chemical Engineering, National Taiwan University of Science and Technology, 43 Keelung Rd., Sec. 4, Taipei 106-07, Taiwan

^b Department of Chemical Engineering, Widya Mandala Surabaya Catholic University, Kalijudan 37, Surabaya 60114, Indonesia

^c Department of Chemical Engineering, University of San Carlos – Talamban Campus, Nasipit, Talamban, Cebu City 6000, Philippines

ARTICLE INFO

Article history:

Available online 24 March 2014

Keywords:

Biodiesel
Soybean oil
Subcritical methanol
Subcritical acetic acid
(*trans*)Esterification

ABSTRACT

Soybean oil (56–80 g) was reacted with methanol (40–106 mL) to produce fatty acid methyl ester in the presence of 1–6% acetic acid under subcritical condition at 250 °C. Stirring and loading of the reaction system affected the yield and severity of the process. The presence of acetic acid improved the yield of FAME from 32.1% to 89.5% at a methanol to oil molar ratio of 20 mL/g. Acetic acid was found to act strongly as an acid catalyst and to some extent improved the solubility between oil and methanol. Reaction pressure higher than the supercritical pressure of methanol (7.85 MPa) was not required to achieve high FAME yield (89.5–94.8%) in short time (30–60 min).

© 2014 Elsevier Ltd. All rights reserved.

1. Introduction

After Saka and Kusdiana [1] introduced supercritical methanol technology to produce biodiesel in 2001, many authors have since then studied biodiesel production by utilizing the unique properties exhibited by methanol under sub and supercritical conditions. Its main advantages include the fact that it requires a relatively shorter time (4–30 min) to produce high purity (>95%) fatty acid methyl esters (FAME) and its tolerance to impurities like water and free fatty acids (FFA), without the use of any catalysts [1–6].

Despite its many advantages over conventional acid and base catalyzed reactions, it has been greatly criticized for the high temperature (>300 °C) and high pressure (>20 MPa) required. Operating at severe temperature and pressure conditions require a well engineered process that can efficiently recover the spent energy [7], which would need high capital cost and for the moment not feasible to commercialize. Another concern is thermal degradation of the product at elevated temperatures. Imahara et al. [8] suggested that the supercritical methanol method should be carried out at temperature below 300 °C, preferably at 270 °C, with a pressure higher than 8.09 MPa. Shin et al. [9] reported that degradation of

unsaturated fatty acids, in the presence of water, was observed at temperatures above 250 °C with an operating pressure of 20 MPa.

In order to decrease the severity of the process, a two-step approach was introduced by Kusdiana and Saka [10] in which hydrolysis was followed by esterification. Fatty acids (FA) and glycerol were firstly produced during hydrolysis at 270 °C for 1 h. After that FAs were separated from glycerol and then esterified with methanol at 270 °C for 40 min to achieve an FAME yield of 94% [11]. This approach seems to use less severe operating conditions but required a long reaction time, resulting in a lower overall productivity and is less energy efficient due to cooling and heating in between steps. Later Minami and Saka [11] introduced an important concept of the catalytic activity of FAs during hydrolysis and esterification. This idea was accepted by some researchers and applied it in the hydrolysis of sunflower oil [12] and *Jatropha* oil [13]. Chen et al. [13] added acetic acid in hydrolysis reaction as a catalyst instead of the common FAs found in vegetable oils. Some researchers disagree with this idea since there is certain limitation for FFA to act as an acid catalyst due to its lower extent of ionization and its large steric hindrance to form an active intermediate with triglyceride [14]. The use of supercritical methanol with acetic acid addition has been investigated by Wei et al. [15] in which high amount of methanol (up to 60 mol per mole of oil) and long reaction time (90 min) were required even with the addition of carbon dioxide as a co-solvent. However the use of acetic acid as both a catalyst and a co-solvent has not been explored.

Abbreviations: FA, fatty acid; FAME, fatty acid methyl ester; FFA, free fatty acid; T_C , critical temperature; P_C , critical pressure; SOR, solvent to oil ratio.

* Corresponding author. Tel.: +886 2 27376612.

E-mail addresses: suryadiismadji@yahoo.com (S. Ismadji), yhju@mail.ntust.edu.tw (Y.-H. Ju).

<http://dx.doi.org/10.1016/j.enconman.2014.03.014>

0196-8904/© 2014 Elsevier Ltd. All rights reserved.

This study aimed to investigate the production of FAME from soybean oil at 250 °C and attempted to utilize acetic acid as a catalyst and a co-solvent to reduce the amount of methanol required. The effects of reactor loading, pressure and stirring on FAME yield were also studied.

2. Materials and methods

2.1. Materials

Refined soybean oil used in this study was obtained from local supermarket. Standards of FA, acylglycerides such as monoolein, diolein and triolein and FAMES were obtained from Supelco (Bellefonte, PA). All solvents and reagents used were either high performance liquid chromatography (HPLC) or analytical reagent grade, obtained from commercial sources.

2.2. Transesterification reactions

Soybean oil (56.6–80.0 g), acetic acid (0.1–40.0 mL) and methanol (40.0–106 mL) were weighed and added into a glass chamber (190 mL) and placed in a high-pressure reactor (290 mL). Unless otherwise specified, the reactions were carried out with a fix total volume of ~170 mL, which is about ~87% of the glass chamber capacity. A detailed reactor description is given elsewhere [16]. The reactor is equipped with an external electric heater and a magnetic stirrer. Temperature in the reactor was controlled to within ± 2 °C. After the sample was put in the reaction chamber, the reactor was sealed and the chamber was purged with N₂.

The reaction was carried out with constant stirring (~300 rpm) at 250 °C to avoid thermal degradation for a predetermined time. Heating rate of the reactor was kept at ~5 °C/min with a heating time of 40–45 min. The moment the reactor reached the desired temperature was counted as time zero. After the reaction, the reactor was rapidly cooled, pressure inside the reactor was released and product in the reactor was collected at room temperature.

Methanol and acetic acid in the product were removed and recovered using a rotary evaporator (BUCHI Labortechnik AG in Flawil, Switzerland) operated at 40 °C and 13.3 kPa. The residual acetic acid and water were further removed by heating the mixture to 80 °C at 13.3 kPa. The collected product containing FAME was washed three times, each using 20 mL 5% NaCl solution, in a separation funnel to remove glycerol and residual acetic acid. The solution was allowed to clarify in between washings. The upper FAME rich phase was withdrawn and dried using a rotary evaporator. The recovered product was weighed and analyzed for its FAME, FA and acylglyceride contents. Results of the reaction were evaluated in terms of FAME yield, conversion and productivity.

FAME yield is defined as the mass of FAME (M_{FAME}) produced per mass of oil (M_{Oil}) used in the reaction. This was calculated using Eq. (1), where A_{FAME} is the area calculated from the GC analysis and f_c is the external calibration factor (slope of the calibration curve) while C_s and V_s are the concentrations and volumes of the samples prepared and injected to the GC for analysis, respectively.

$$\begin{aligned} \text{FAME yield (\%)} &= \frac{M_{\text{FAME}}}{M_{\text{Oil}}} \times 100\% \\ &= \frac{M_{\text{product}}}{M_{\text{Oil}}} \times \frac{\sum A_{\text{FAME}} \cdot f_c}{C_s V_s} \times 100\% \end{aligned} \quad (1)$$

Conversion of FAME was calculated using Eq. (2). The theoretical FAME yield based on stoichiometry where 1 mol of triacylglyceride produces 3 mol of FAME was used as reference to incorporate the un-reacted partial glycerides and FFAs.

$$\text{Conversion (\%)} = \frac{\text{FAME yield}}{\text{Theoretical FAME yield}} \times 100\% \quad (2)$$

Productivity is an important parameter in chemical processes but is often overlooked. Eq. (3) was utilized to calculate the productivity, which is defined as the amount of FAME (M_{FAME}) produced per reactor volume ($V_r = 240$ mL) per reaction time (t).

$$\text{Productivity} \left(\frac{\text{kg}}{\text{L h}} \right) = \frac{M_{\text{FAME}}}{V_r t} \quad (3)$$

Experiments were carried out in triplicates and values reported are average values of the triplicate trials.

2.3. Gas chromatography analysis

A 20 mg aliquot of the lipid sample was dissolved in ethyl acetate and filtered through a 0.2 μm PTFE hydrophobic membrane to remove moisture. From this prepared solution, a 1.0 μL sample was injected into a high temperature gas chromatography (HTGC) for analysis. External calibration curve was generated using 0.2–20 mg of a pure standard dissolved in ethyl acetate. The calibration curve was generated by fitting a straight line with the y-intercept passing through zero ($R^2 > 0.99$).

Qualitative and quantitative analyses of FAME and un-reacted FFA in each sample were performed using a Shimadzu GC2010 (Kyoto, Japan) equipped with a split-injector and a FID. Separation was carried out on a ZB-5HT (5% phenyl)-methylpolysiloxane non-polar column (15 m \times 0.32 mm i.d., 0.1 mm film thickness) (Zebtron, Phenomenex, Torrance, CA, USA). Both injector and detector temperatures were set at 370 °C. The column temperature was programmed to increase at a rate of 15.0 °C/min from 80 °C to 365 °C and held at 365 °C for 48 s. N₂ was used as the carrier gas with a linear velocity of 30 cm/s at 80 °C. Data analyses were carried out by the software “GC Solution version 2.3”, Shimadzu.

3. Results and discussion

3.1. Effects of reactor loading and pressure

In principle the effect of pressure can only be accurately investigated using a tubular flow reactor where pressure can be controlled via a backpressure regulator. For a batch reactor altering the initial amounts of oil and methanol could change the reactor pressure. However there have been various interpretations with regards to initial amount of reactants charged into a batch reactor. Some authors chose to carry out reactions with fixed amount of oil and varying the amount of methanol to investigate the effects of methanol to oil ratio and used an inert gas like nitrogen to maintain a given final pressure [13,15]. Fig. 1 shows the effects of solvent to oil ratio at a fixed amount of soybean oil. Apparently the increase in solvent to oil ratio (SOR) resulted in an increase in FAME yield since forward reaction during transesterification was favored in the presence of excess methanol.

Some researchers varied the amounts of reactant but used only a fixed percentage of the total reactor volume [17,18]. Fig. 2 shows the effects of the reactor loading at a fixed SOR on FAME yield and reactor pressure. It is evident that FAME yield and reactor pressure both increased with increasing reactor loading. A higher reactor loading corresponds to a smaller void volume, which serves as space for expansion of reactants. Since methanol has much lower boiling point (68 °C) than oil or any of the reaction products, it is safe to assume that part of methanol occupies the void space as vapor. If smaller space is available for the vapor at a fixed temperature, it results in higher system pressure. It was also observed that reactor pressure decreased as reaction proceeded. In batch reaction, pressure changes in the course of reaction due to changing amounts of reactants and products [19]. Nevertheless, it can be observed from the results that it is not necessary to reach the

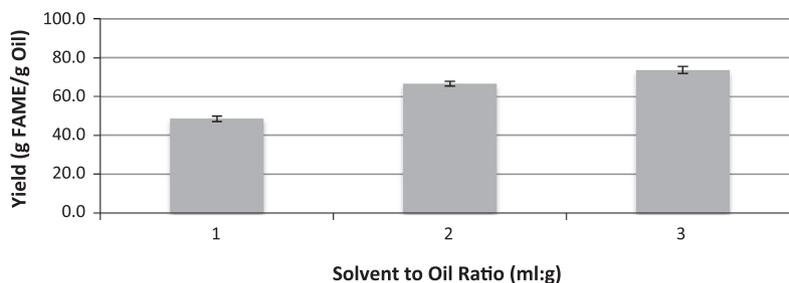


Fig. 1. Effects of solvent loading at a fixed amount of oil (5 g) and solvent composition (acetic acid:methanol = 1:3, v/v). Reactions were carried out at 250 °C for 60 min with constant stirring and pressurized to 10.0 MPa using N₂.

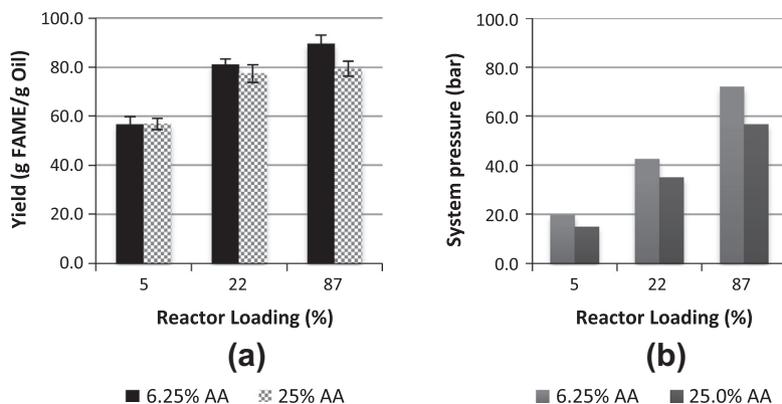


Fig. 2. Effects of reactor loading at a fixed solvent (acetic acid + methanol) to oil ratio of 1 mL/g. Reactions were carried out at 250 °C for 60 min with constant stirring and without any pressurizing gas. (a) FAME yield and (b) reactor pressure.

supercritical pressure of methanol (8.1 MPa) in order for the reaction to take place and achieve high FAME yield.

From a comparison of the results in Figs. 1 and 2, it can clearly be seen that with the same initial amount of oil (5 g), the same SOR and the same reactor loading (~5%), the addition of an inert gas to pressurize the reactor did not improve the FAME yield. The addition of inert gas as a third component to improve the solubility and pressure has previously been found to have no positive effects on FAME yield [6,20]. Imahara et al. [20] suggested that the presence of a third component (N₂ or CO₂) tends to dilute the reaction system. This was also observed in this study, where FAME yield was found to be higher (56.9%) compared to that pressurized with N₂ (48.6%). In addition a high FAME yield (80–90%) can be achieved at a lower SOR (1 mL/g) and at a higher reactor loading (87%).

The importance of these results is that although pressurized reactor seems to provide logical results, which were usually observed (FAME yield increased with increasing SOR); it provides a misleading impression that high SOR and pressure are required to achieve high FAME yield. Minimizing void or maximizing the utilization of reactor volume is important to induce an increase in reactor pressure and reduce the amount of methanol in the vapor phase. Inert gas could be used to increase the reactor pressure but could not effectively drive the vaporized methanol back to the liquid phase.

3.2. Effects of stirring and addition of acetic acid

The effect of stirring was investigated in supercritical methanol transesterification reaction in the presence of a co-solvent and conclusion was made that stirring has no positive effect on reaction [21], since the reactants are often claimed to be in a single supercritical phase. Moreover, most studies were carried out in small reactors made of stainless steel tube fittings and parts with size ranging from 5 to 10 mL, thus stirring was not possible

[2,3,7,17]. Mixing in these small reactors may not be required due to the bigger surface area of contact between oil and methanol owing to its small diameter and longer reactor body, typically oriented horizontally. In their study, Glisic and Skala [22] observed that at temperatures below 240 °C, two to four distinct phases of the various product mixtures coexisted and predicted that single supercritical phase exists only at temperatures over 270 °C and at a methanol to oil molar ratio of 42.

Fig. 3 shows the effect of stirring on FAME yield. It can be seen that without stirring the doubling of SOR resulted in a twofold increase of FAME yield from 19.2% to 38.0%, consistent with most observations reported in literature that an increase in methanol amount resulted in improved in FAME yield [4,5,18]. Upon stirring higher FAME yields were obtained due to better contact between reactants. Although in this study observation could not be made at high temperature such as 250 °C, by applying stirring at room temperature a suspension of microsphere-like oil globules sus-

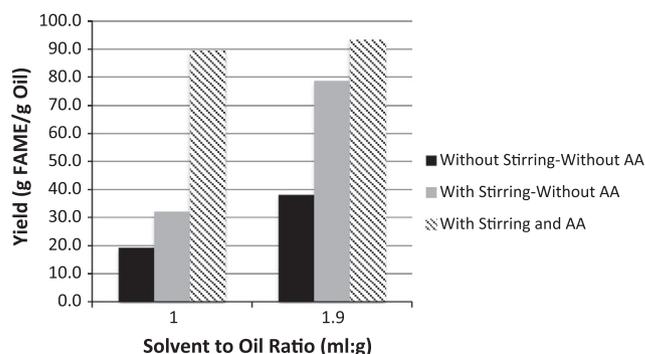


Fig. 3. Effects of stirring and addition of acetic acid (6.25 wt.% based on oil) at a fixed reactor loading (87%) and methanol to oil ratio. Reactions were carried out at 250 °C for 60 min with a system pressure of 6.5–7.5 MPa.

pended in methanol was observed. Thus stirring did increase the surface area of contact between oil and methanol during reaction at high temperature. The addition of acetic acid (6.25%) in methanol resulted in surprisingly high FAME yields of 89.5% and 93.4% at an SOR of 1 and 1.9 mL/g, respectively.

Acetic acid could have aided the reaction by:

- Acting as an acid catalyst during the reaction.
- Improving the inter-solubility between reactants by acting as a co-solvent.
- The possible formation of methyl acetate through the methylation of acetic acid, which is known to act as a good solvent for lipids and is miscible with methanol.

3.3. Effects of SOR and amount of acetic acid in solvent

As discussed in the previous section the FAME yield obtained at 250 °C was improved upon stirring, while increasing SOR, FAME yield can be increased to a greater extent. However the presence of acetic acid significantly lowered down the difference between FAME yields obtained at the two different SOR (1 and 1.9 mL/g) investigated. These results suggest that high FAME yield could be achieved at SOR lower than that used in supercritical methanol method (typically 1.9 mL/g or 42:1 M ratio of methanol to oil) [5].

The effects of SOR and amount of acetic acid on FAME yield and conversion were investigated and the results are shown in Table 1. Both optimum FAME yield and conversion of about 95% were obtained at a methanol to oil ratio of 35 and a acetic acid of 6.25 wt.% (based on oil). For reactions carried out without the addition of acetic acid, FAME yield and conversion increased by ~145% when the amount of methanol present in the system was doubled. Addition of acetic acid at the same amount of methanol to oil ratio resulted in significant increase in FAME yield and conversion. However, by adding the same amount of acetic acid per gram of oil, the effect of increasing methanol to oil ratio on the increase of FAME yield and conversion is insignificant ($p = 0.05$).

In view of productivity, reactions carried out without acetic acid have productivities directly proportional to the methanol to oil ratio. Reactions carried out with the addition of acetic acid, on the other hand resulted in productivities which are inversely proportional to methanol to oil ratio. This is because experiments were carried out at a fixed volume (166–170 mL) and the amount of oil processed per batch decreased with increasing methanol to oil ratio. Since FAME yield for reactions with acetic acid are about 89–95%, the amount of oil processed per batch becomes the main

factor that affects the overall productivity of the process. Thus a methanol to oil ratio of 20 is preferable as this resulted in the highest productivity ($0.3 \text{ kg L}^{-1} \text{ h}^{-1}$).

In Table 1, all reactions were carried out for 1 h. By increasing methanol to oil ratio, the same FAME yield can be achieved in a shorter reaction time as shown in Fig. 4. It can be seen that reaction carried out at higher methanol to oil ratio (35:1) resulted in high FAME yield (89.5%) in shorter time (30 min) compared to the same FAME obtained when using a lower methanol to oil ratio (20:1) that required a longer reaction time (1 h). The time required to obtain the same FAME yield was cut down by half, when the amount of methanol utilized was almost doubled, resulting in comparable productivities. Although higher amount of methanol utilized can be compensated by shorter reaction time, environmental concerns and overall economics of the process should be taken into account. A high initial methanol loading would result in large excess of methanol together with the product stream that needs to be recycled. A life cycle analysis on supercritical methanol process by Kiwjaroun et al. [23] showed that recycling of excess methanol consumes more energy than feedstock pumping and reactor heat-

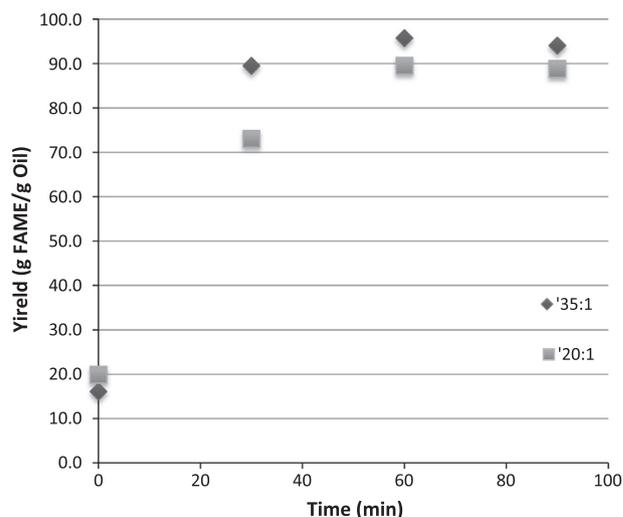


Fig. 4. Effects of reaction time on FAME yield at different methanol to oil ratios. Acetic acid (6.25 wt.% based on oil) was added. Reactions were carried out at a fixed reactor loading (87%), 250 °C for 60 min with constant stirring.

Table 1
Effects of methanol to oil ratio on FAME yield, conversion and productivity with varied amounts of acetic acid. Reactions were carried out with constant stirring (300 rpm) at 250 °C for 1 h.

Methanol:oil ratio	Oil (g)	Methanol (mL)	AA (mL)	Total volume (mL)	FAME yield (%) ^a	Total FAME (g)	Conversion (%)	Productivity (kg/L/h)
<i>No acetic acid added</i>								
21	80.0	80.0	–	166	32.1 ^a	25.7	32.0	0.11
42	56.5	109.0	–	168	78.8 ^b	44.5	78.6	0.18
<i>3.125 wt.% acetic acid based on oil</i>								
20	80.0	77.5	2.5	166	91.7 ^c	73.4	91.3	0.30
25	73.0	89.5	2.3	170	93.6 ^c	68.3	93.2	0.28
30	67.0	95.9	2.1	170	94.5 ^c	63.3	94.1	0.26
35	61.0	102	2.0	169	94.4 ^c	57.6	94.1	0.24
40	56.5	108	1.8	169	93.8 ^c	53.0	93.5	0.22
<i>6.25 wt.% acetic acid based on oil</i>								
20	80.0	75.0	5.0	166	89.5 ^c	71.6	89.1	0.30
25	73.0	87.5	4.5	170	91.3 ^c	66.6	90.8	0.28
30	67.0	93.8	4.2	170	94.8 ^c	63.5	93.4	0.26
35	61.0	100	4.0	169	94.9 ^c	58.4	95.3	0.24
40	56.5	105	3.5	169	93.4 ^c	53.2	93.7	0.22

^a Average value of 3 independent experiments with an uncertainty of $\pm 1.7\%$, means followed by the same letter do not differ significantly from one another ($p = 0.05$), by Duncan's multi-range test.

Table 2

Effects of acetic acid to methanol ratio on FAME yield. Reactions were carried out at a fixed solvent to oil ratio of 1 mL/g, a reactor loading of 87% with constant stirring (300 rpm) at 250 °C for 1 h.

80 mL Solvent mixture (methanol + AA)											
% AA	0.0	0.1	0.6	1.3	3.1	6.3	12.5	18.8	25	37.5	50.0
80 g Oil	Yield										
FAME	32.1	45.2	85.8	91.6	91.6	89.5	84.7	83.6	77.3	69.0	62.8
FFA	0.5	0.5	0.5	0.6	0.6	0.8	0.5	2.3	2.7	13.8	17.0
MG	9.1	11.9	4.0	4.0	4.6	5.7	11.1	9.5	12.9	12.0	11.9
DG	29.7	23.8	4.4	0.3	0.6	1.7	3.5	3.5	6.9	4.5	6.7
TG	27.0	17.9	5.1	2.3	0.3	2.2	1.0	0.8	0.7	0.6	0.6

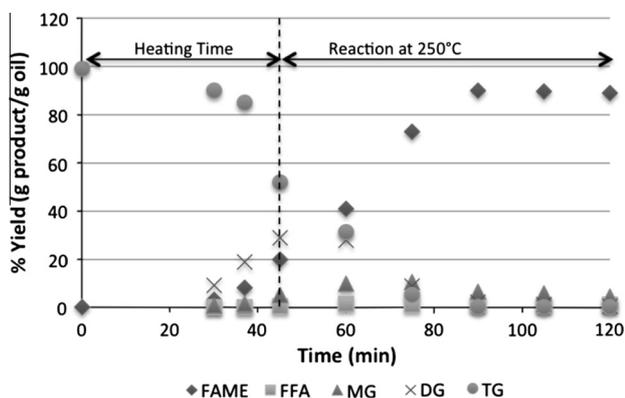


Fig. 5. Reaction time courses. Reaction conditions: methanol to oil molar ratio = 20:1; 6.25 wt.% acetic acid (based on oil); reactor loading (87%); reaction temperature = 250 °C; reaction time = 60 min; with constant stirring.

ing, which at the same time generating significant amount of environmental load.

3.4. Effects of acetic acid to methanol ratio

Table 2 summarizes FAME yields obtained using different acetic acid to methanol ratios in the solvent (acetic acid + methanol). It seems that optimum FAME yield could be achieved by using 1–6% acetic acid in the solvent. As the amount of acetic acid increased, the amount of free fatty acid (FFA) in the product also increased. Since the total solvent amount was fixed (80 mL), methanol amount decreased with increasing acetic acid amount. Thus the FFA released was not effectively converted to FAME or probably at a slower rate. Beyond the optimum acetic acid amount, the amount of monoglycerides in the product also increased with increasing acetic acid concentrations, which may be due to the reverse reaction as more FFA was released in the presence of lesser amount of methanol. This result suggests that the reaction

proceeded firstly by the transesterification of acetic acid with triglycerides, which releases FFA.

Saka et al. [24] reported that the transesterification of triglycerides with acetic acid has higher reactivity than that of the supercritical methylation using methanol or methyl acetate. The activation energy for the transesterification reaction between triglyceride and acetic acid was not specified, but an estimated value of $\sim 44.2 \text{ kJ mol}^{-1}$ at 250–320 °C was obtained from their result [24]. This activation energy is lower than the activation energy of the supercritical methanolysis of triglycerides ($69.2\text{--}92.0 \text{ kJ mol}^{-1}$ at 200–300 °C) [1,6,24] and the activation energy of the esterification of oleic acid (54.7 kJ mol^{-1} and $176.9 \text{ kJ mol}^{-1}$ at the subcritical and supercritical state of methanol) [6]. This further supports the mechanism of that the reaction proceeds firstly with the transesterification of triglyceride with acetic acid, followed by the esterification of the FFAs released, which are more reactive than triglyceride; thus also explains the lower temperature required for the reaction to proceed. Although acetic acid could be consumed as the reaction proceeds, an equimolar amount of FFAs is generated, which is believed to have the same catalytic effect [24]. Taking into consideration that water is produced as a by-product during esterification, acetic acid could be regenerated as a product of hydrolysis reaction.

Fig. 5 shows the time courses of the reaction. It can be seen that reactions are less likely to proceed at temperatures below 200 °C (during heating) and a steep increase in FAME yield was observed at 250 °C (45 min). The reaction approached equilibrium in 45 min at 250 °C. Extending reaction time up to 120 min did not result in higher FAME yield. At 200 °C even prolonging reaction time to 120 min only resulted in a FAME yield of $\sim 34\%$ (data not shown).

3.5. Catalytic activity of acetic acid

As mentioned previously, there is disagreement between the proposed catalytic effect of FFA as a weak organic acid [11,23] and the limitation of FFA to catalyze (*trans*)esterification due to

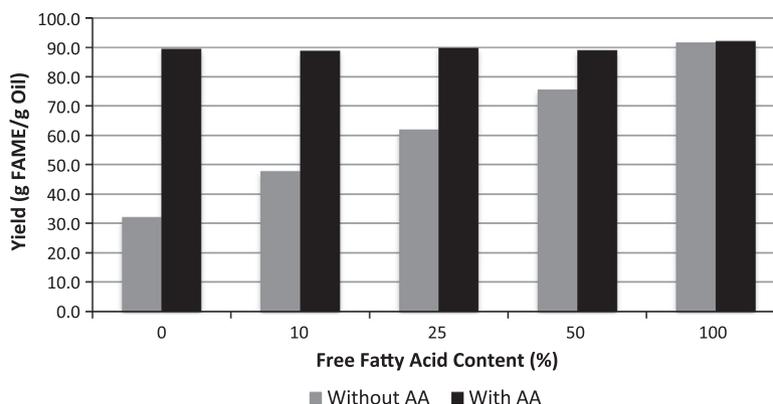


Fig. 6. Effects of FFA content on FAME yield. Reaction conditions: methanol to oil molar ratio = 20:1; 6.25 wt.% acetic acid (based on oil); reactor loading (87%); reaction temperature = 250 °C; reaction time = 60 min; with constant stirring.

Table 3

Comparison with other sub and supercritical methanol processes.

Oil	Methanol:oil ratio	Stirring (rpm)	Temp. (°C)	Pressure (MPa)	Time (h)	FAME yield (%)	Refs.
Rapeseed	42	–	350	45.0			[1]
Soybean							
5:1 methanol to CO ₂	42	300	300	20.0	0.5	90.6	[26]
Soybean							
20:1 methanol to propane	24	–	280	12.8	0.2	~98	[4]
Soybean							
Pressurized with CO ₂	60	–	280	20.0	1.5	97.8	[15]
Coconut	42	–	350	19.0	0.1	~95	[5]
Soybean	36	1000	250	24.0	0.5	~94	[25]
Sunflower							
Pressurized with CO ₂	25	–	320	10.0	0.4	~70	[6]
Coconut							
10:1 methanol to ether	30	–	305	–	0.33	~85	[21]
Rapeseed	36	400	250	10.2	0.33	~10	[27]
Soybean	42	300	350	–	0.17	~95	[28]
Soybean							
1% K ₃ PO ₄	24	–	220	–	0.5	95.6	[29]
Soybean							
0.5% Na ₂ SiO ₃	36	–	220	3.0	0.5	95.6	[30]
Soybean							
4.0% H ₂ SO ₄ and carbon dioxide	12	–	70	10.0	4.0	~99	[31]
Soybean							
3.1% AA	30	300	250	7.2 (65) ^a	0.5	89.5	This study
Soybean							
3.1% AA	30	300	250	7.2 (62) ^a	1.0	94.8	This study
Soybean							
6.25% AA	20	300	250	7.0 (62) ^a	1.0	91.3	This study

^a System pressure upon reaching 250 °C (at the end of the reaction).

steric hindrance caused by its molecular structure and size [14]. Acetic acid is a better catalyst than FFAs as it would be less sterically hindered from a structural and mechanistic point of view.

From Fig. 6, it is clear that without the presence of acetic acid FAME yield increased with increasing initial FFA content in feedstock oil. The addition of acetic acid (6.25 wt.% based on oil) resulted in the same FAME yield regardless of the initial FFA content in the oil. These results further suggest that acetic acid did act as an acid catalyst and has a much stronger catalytic activity than long chain FFAs.

Prior to reaction it was observed that solubility of oil in methanol increased with increasing amount of initial FFA in the oil. At an initial FFA content of 50%, a homogeneous mixture of the reactants was formed even at room temperature. Thus the presence of FFA acted more as a co-solvent than a catalyst during the reaction.

3.6. Process evaluation

Table 3 is a comparison of results of this study with those of some sub- and supercritical processes reported in literatures. Most processes required high methanol to oil ratio (>40), high temperature (>300 °C) and high pressure (>20 MPa). Processes that were capable of lowering down the methanol ratio to 24 typically required the use of a co-solvent, which in turn still resulted in a higher overall solvent to oil ratio. Gaseous solvents like propane [4] have been successfully utilized to lower down both temperature and methanol loading but might involve greater risk during operation. The use of carbon dioxide as a green co-solvent resulted in varying results. For some it was able to lower down the operating temperature but not the methanol to oil ratio [26], while others reported no positive effect on FAME yield and operating severity [6,20]. Although different feedstocks have been used, vigorous stirring at 1000 rpm [25] resulted in high FAME yield compared to that stirred at 400 rpm [27].

Other attempts to operate at subcritical methanol conditions include the use of low concentration of insoluble base (K₃PO₄ and

Na₂SiO₃) as heterogeneous catalyst in the reaction for ease of recovery. Reactions through this approach achieved high yields (~96%) at relatively lower temperature (220 °C) and pressure (3.0 MPa) over a short reaction time of 30 min [29,30]. Compared to the proposed method in this study, the use of K₃PO₄ was found to have its shortcomings if there is FFA. The presence of 1% FFA resulted in a decrease of yield from ~96% to ~87% and further to ~51% when FFA was increased to 15% [29]. As solid catalyst recovery for both K₃PO₄ and Na₂SiO₃ seem to be easier but in the case of Na₂SiO₃ calcination at 400 °C for 4 h was required before reutilizing the catalyst [30]. The use of acid like sulfuric acid was also em-

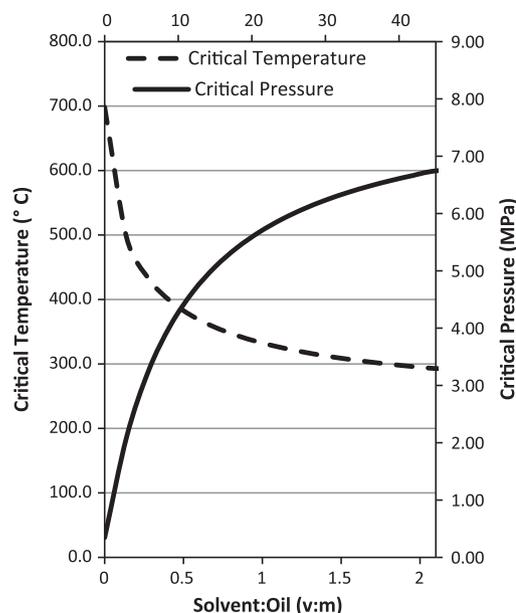


Fig. 7. Pseudo-critical temperature and pressure of methanol–oil mixture estimated by Lorentz–Berthlot type mixing rules [5].

Table 4

Predictions of pseudo-critical temperature and pressure of methanol–acetic acid mixture estimated by Lorentz–Berthlot type mixing rules [5].

Properties	Units	Methanol	Acetic acid (%)								Acetic acid
			5	10	15	20	25	30	40	50	
MW	g/mol	32.0	33.1	34.09	35.15	36.25	37.39	38.56	41.03	43.7	60.0
T_c	°C	240	243	246	250	253	257	261	268	276	319
P_c	MPa	8.10	7.92	7.82	7.71	7.61	7.51	7.43	7.18	6.96	5.79
V_c	m ³ /kmol	0.12	0.12	0.12	0.12	0.13	0.13	0.13	0.14	0.143	0.18
Z_c		0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.22	0.21

ployed together with CO₂ as co-solvent to achieve complete conversion at low temperatures of 70–90 °C [31]. Again the problem of catalyst recycling or disposal becomes a major hindrance in an environmental point of view and the use of carbon dioxide at a high pressure of 10 MPa would still require pressurized vessels like any sub and supercritical transesterification processes.

In a technoeconomic study by Marchetti and Errazu [32] the major cost indicators of a supercritical biodiesel plant are operating cost and cost of raw material, which were found nearly twice of that required by other process. A separate study by Marchetti [33] on the economical variables in supercritical biodiesel showed that changes in methanol price could result in as much as 82% decrease in the internal rate of return. These are mainly due to the severe operating conditions and high amounts of methanol required for the process. Moreover it was found that the high investment for supercritical methanol technology is required due to the high temperature and high-pressure reactor (~350 °C and ~20 MPa) [33]. The addition of acetic acid made it possible to obtain high FAME yield at lower severity (250 °C, ~7.0 MPa) by using lower methanol to oil ratio (20–30 mol per mole oil) with moderate stirring. Acetic acid can easily be recovered together with methanol in the down stream process by evaporating or distilling during solvent recovery. It was observed in this study that in the recovery of solvents, the products was separated into a glycerol-rich bottom layer and a FAME-rich upper layer. Separation of glycerol and FAME is also relatively easy similar to that in the supercritical methanol processes.

The use of the terminology “supercritical methanol process” often leads to confusion as to whether the entire reaction system is at supercritical state or only methanol is at supercritical state. Methanol is at supercritical state as long as the temperature exceeds 240 °C and pressure exceeds 8.1 MPa. However, the supercritical temperature (T_c) of oil is much higher than that of methanol. By using the Constantinou and Gani (CG) method of group contributions [34], and the pseudo-triglyceride model proposed by Espinosa et al. [35] the T_c and critical pressure (P_c) of soybean oil can be estimated and is found to be 698.3 °C and 0.34 MPa, respectively.

Fig. 7 shows that the pseudo T_c and P_c of methanol–oil mixture obtained by Lorentz–Berthlot type mixing rules [5]. It indicates that as methanol content increases, T_c decreases while P_c increases. Single phase could be achieved at 300 °C at an SOR of 1.9 mL/g, or a methanol to oil molar ratio of 42. At lower methanol loading a single-phase pseudo-critical state could not be guaranteed.

As shown in Table 4, the presence of acetic acid helps lowering the P_c but slightly increases the T_c of the methanol–acetic acid mixture. Thus in this study, the operating temperature (250 °C) exceeded the T_c of the solvent mixture (243 °C) but the pressure (6.5–7.5 MPa) was lower than P_c of the solvent mixture (7.9 MPa).

If the presence of oil is taken into consideration, T_c of the oil–methanol–acetic acid mixture should be much higher (according to Fig. 7 >325 °C) thus the operation temperature used in this study (250 °C) is lower than the mixtures apparent T_c . Although the presence of oil induces a decrease in P_c , the operation pressure

(6.5–7.5 MPa) used in this study is lower than P_c of the mixture. Thus the oil–methanol–acetic acid mixture investigated in this study is believed to be in subcritical state.

4. Conclusion

It was found in this study that pressure higher than P_c of methanol is not necessarily required to achieve high FAME yield. Stirring improved FAME yield which helps justifying that the reactions were carried out under subcritical condition. The use of acetic acid to improve FAME yield under subcritical condition was also investigated in this study. The addition of acetic acid was able to lower down the reaction temperature from higher than 300 °C, which is typically required in supercritical methanol processes, to 250 °C and still achieving high yield (90–95%) in reasonable short time (30–60 min). Acetic acid was found to act strongly as an acid catalyst and improve the solubility between oil and methanol. An optimization of the process may lead to reduction of the required methanol to as much as 20 mol per mole of oil without significantly affecting the FAME yield.

Acknowledgments

The authors would like to acknowledge the financial supports of the National Science Council of Taiwan (NSC 102-2221-E-011 -079) and National Taiwan University of Science and Technology (102H451403).

References

- [1] Saka S, Kusdiana D. Biodiesel fuel from rapeseed oil as prepared in supercritical methanol. *Fuel* 2001;80:225–31.
- [2] Warabi Y, Kusdiana D, Saka S. Reactivity of triglycerides and fatty acids of rapeseed oil in supercritical alcohols. *Bioresour Technol* 2004;91:283–7.
- [3] Kusdiana D, Saka S. Effects of water on biodiesel fuel production by supercritical methanol treatment. *Bioresour Technol* 2004;91:289–95.
- [4] Cao W, Han H, Zhang J. Preparation of biodiesel from soybean oil using supercritical methanol and co-solvent. *Fuel* 2005;84:347–51.
- [5] Bunyakiat K, Makmee S, Sawangkeaw R, Ngamprasertsith S. Continuous production of biodiesel via transesterification from vegetable oils in supercritical methanol. *Energy Fuel* 2006;20:812–5.
- [6] Tsai YT, Lin HM, Lee MJ. Biodiesel production with continuous supercritical process: non-catalytic transesterification and esterification with or without carbon dioxide. *Bioresour Technol* 2013. (in press). <http://dx.doi.org/10.1016/j.biortech.2012.12.157>.
- [7] Pinnarat T, Savage PE. Noncatalytic esterification of oleic acid in ethanol. *J Supercrit Fluid* 2010;53:53–9.
- [8] Imahara H, Minami E, Hari S, Saka S. Thermal stability of biodiesel in supercritical methanol. *Fuel* 2008;87:1–6.
- [9] Shin YH, Ryu JH, Park SY, Bae SY. Thermal stability of fatty acids in subcritical water. *J Anal Appl Pyrol* 2012;98:250–3.
- [10] Kusdiana D, Saka S. Two-step preparation for catalyst-free biodiesel production. *Appl Biochem Biotechnol* 2004;113–6.
- [11] Minami E, Saka S. Kinetics of hydrolysis and methyl transesterification for biodiesel production in two-step supercritical methanol process. *Fuel* 2006;85:2479–83.
- [12] Alenezi R, Leeke GA, Santos RCD, Khan AR. Hydrolysis kinetics of sunflower oil under subcritical water conditions. *Chem Eng Res Des* 2009;87:867–73.
- [13] Chen CH, Chen WH, Chang CMJ, Lai SM, Tu CH. Biodiesel production from supercritical carbon dioxide extracted *Jatropha* oil using subcritical hydrolysis and supercritical methylation. *J Supercrit Fluid* 2010;52:228–34.

- [14] Du ZX, Tang Z, Wang HJ, Zeng JL, Chen YF, Min EN. Research and development of a sub-critical methanol alcoholysis process for producing biodiesel using waste oils and fats. *Chin J Catal* 2013;34:101–15.
- [15] Wei CY, Huang TC, Chen HH. Biodiesel production using supercritical methanol with carbon dioxide and acetic acid. *J Chem* 2013. <http://dx.doi.org/10.1155/2013/789/594>.
- [16] Go AW, Liu YT, Ju YH. Applicability of subcritical water treatment on oil seeds to enhance extractable lipid. *Biol Energy Res* (in press). <http://dx.doi.org/10.1007/s12155-013-9397-1>.
- [17] Tan KT, Lee KT, Mohamed AR. Effects of fatty acids, water content and co-solvent on biodiesel production by supercritical methanol reaction. *J Supercrit Fluid* 2010;53:88–91.
- [18] Han H, Cao W, Zhang J. Preparation of biodiesel from soybean oil using supercritical methanol and CO₂ as co-solvent. *Proc Biochem* 2008;131:238–43.
- [19] Sawangkeaw R, Bunyakiat K, Ngamprasertsith S. A review of laboratory scale research on lipid conversion to biodiesel with supercritical methanol (2001–2009). *J Supercrit Fluid* 2010;55:1–13.
- [20] Imahara H, Xin J, Saka S. Effects of CO₂/N₂ addition to supercritical methanol on reactivities and fuel qualities in biodiesel production. *Fuel* 2009;88:1392–32.
- [21] Jiang JJ, Tan CS. Biodiesel production from coconut oil in supercritical methanol in the presence of cosolvent. *J Taiwan Inst Chem Eng* 2012;43:102–7.
- [22] Glisic SB, Skala DU. Phase transition at subcritical and supercritical conditions of triglycerides methanolysis. *J Supercrit Fluid* 2010;54:71–80.
- [23] Kiwjaroun K, Tubtimdee C, Piumsomboon P. LCA studies comparing biodiesel synthesized by conventional and supercritical methanol methods. *J Clean Prod* 2009;17:143–53.
- [24] Saka S, Isayama Y, Jianyu X. New process for catalyst-free biodiesel production using subcritical acetic acid and supercritical methanol. *Fuel* 2010;89:1442–6.
- [25] Wang L, Yang J. Transesterification of soybean oil with nano-MgO or not in supercritical and subcritical methanol. *Fuel* 2007;86:328–33.
- [26] Yin JZ, Xiao M, Song JB. Biodiesel from soybean oil in supercritical methanol with co-solvent. *Energy Convers Manage* 2008;49:908–12.
- [27] Wang LY, He HY, Xie ZF, Yang JC, Zhu SL. Transesterification of the crude oil of rapeseed with NaOH in supercritical and subcritical methanol. *Fuel Process Technol* 2007;88:477–81.
- [28] Yin JZ, Xiao M, Wang AQ, Xiu ZL. Synthesis of biodiesel from soybean oil by coupling catalyst with subcritical methanol. *Energy Convers Manage* 2008;49:3512–6.
- [29] Yin JZ, Ma Z, Shang ZY, Hu DP, Xiu ZL. Biodiesel production from soybean oil transesterification in subcritical methanol with K₃PO₄ as catalyst. *Fuel* 2012;93:284–7.
- [30] Yin JZ, Ma Z, Hu DP, Xiu ZL, Wang TH. Biodiesel production from subcritical methanol transesterification of soybean oil with sodium silicate. *Energy Fuels* 2010;24:3179–82.
- [31] Ma Z, Sang ZY, Wang EJ, Xu JC, Xu QQ, Yin JZ. Biodiesel production via transesterification of soybean oil using acid catalyst in CO₂ expanded methanol liquids. *Ind Eng Chem Res* 2012;51:12199–204.
- [32] Marchetti JM, Errazu AF. Technoeconomic study of supercritical biodiesel production plant. *Energy Convers Manage* 2008;49:2160–4.
- [33] Marchetti JM. Influence of economical variables on a supercritical biodiesel production process. *Energy Convers Manage* 2013;75:658–63.
- [34] Polling BE, Prausnitz JM, O'Connell JP. *The properties of gases and liquids*. 5th ed. New York: Mc-Graw-Hill; 2011.
- [35] Espinosa S, Fornari T, Bottini S, Brignole EA. Continuous production of biodiesel via transesterification from vegetable oils in supercritical methanol. *J Supercrit Fluid* 2002;23:91–102.